

# Horizontal Blast Cleaning Machine Blastrac 2-30DS



Shot Blasting



400 V, 50 Hz, 63 A, CEE



To pull




Working Speed :  
0,5 - 29 m/min



750 Kg

UNDERGROUND	<input checked="" type="checkbox"/> Steel
	<input checked="" type="checkbox"/> Concrete
	<input checked="" type="checkbox"/> Stone
	<input checked="" type="checkbox"/> Asphalt
	<input type="checkbox"/> Others

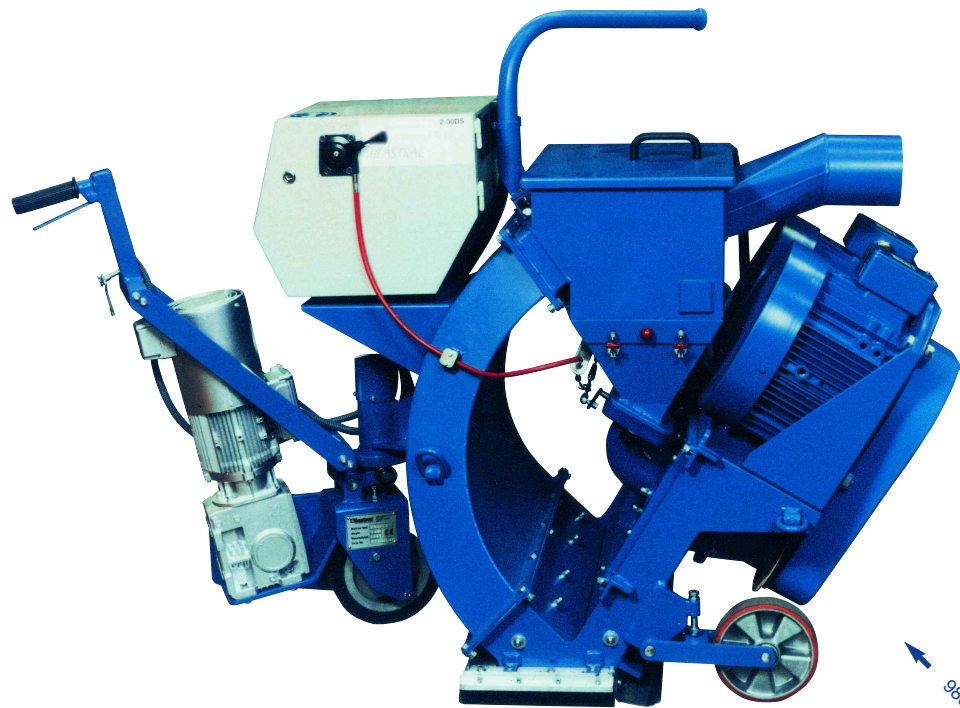

1 200 mm

980 mm

1 900 mm

## Blastrac 2-30DS

Working width :	800 mm
Blasting capacity :	up to 600 m <sup>2</sup> / h on concrete
Working areas :	large horizontal surfaces (supermarkets, hangars, car parks, ramps, runways, airports...)
Wheel power :	2 x 15 kW
Scope of supply :	Shotblast machine 2-30DS, User manual
Optional starting kit :	Dust collector 854DCI / 20 m suction hose ø 150 mm / Magnetic broom 800 mm / Maintenance kit / Blastrac steel abrasive
	Please contact your Blastrac Expert for these options

## Main assets :

- Closed circuit, dust free (if connected to an appropriate dust collector)
- Ideal machine for surface preparation professionals and specialists
- The largest blast pattern of walk-behind machine range
- Abrasive consumption < 100 gr / m<sup>2</sup>
- 
- 
- 
- 
- 

## Industry working areas



Industrial flooring



Decontamination



Road Maintenance



Airport



Asphalt Blasting



**BLASTRAC**  
An International Surface Preparation Technology